


SNMPCard Reset to Factory Default

AA. Manual to factory default

1. Find the S1 on the PCB of CY504PB. S1 should be close to LED
2. Place a jumper on S1
3. Input power and let it run for about 3-5 mins
4. Remove jumper and then power
5. Now, input power again, see if device works now.

If once does not succeed , try several more time as the hardware should reset eventually

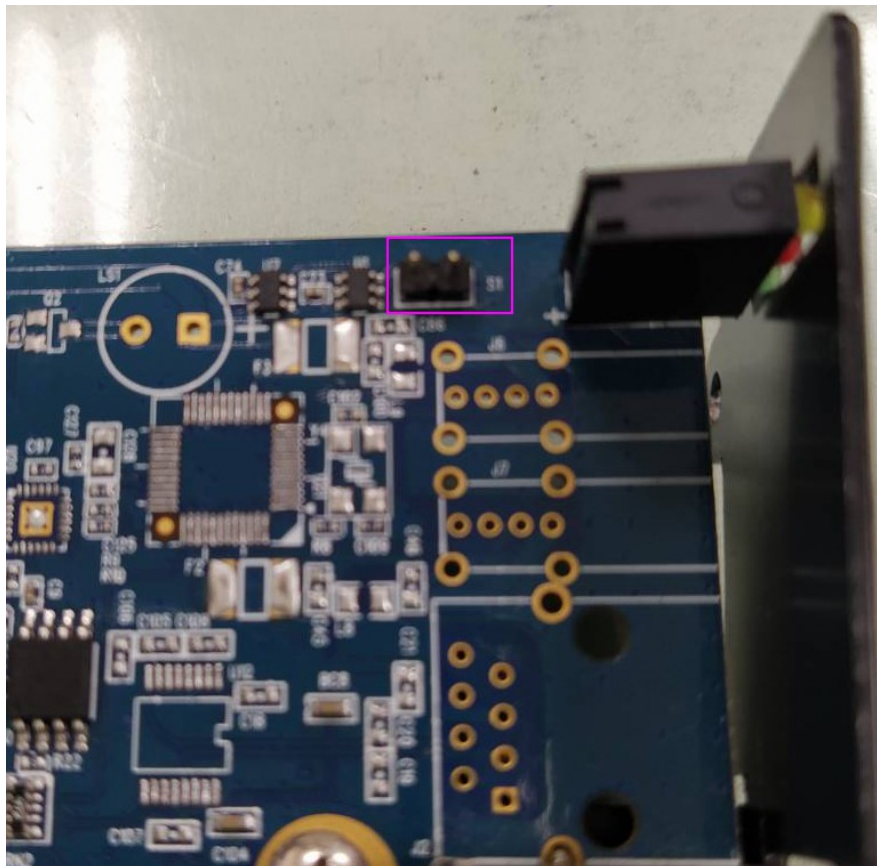

BB. Web to factory default >> Help >> About >> Reset to factory default

The screenshot shows a web browser window displaying the NetAgent IX interface. The browser's address bar shows the URL 192.168.0.34. The page title is 'NetAgent IX'. On the left, there is a navigation menu with options: Information, Configuration, Log Information, Help, Search NetAgent, Serial Port Debug, Help, and About (selected). The main content area is titled 'Help > About' and contains two tabs: 'About' and 'Firmware Update Settings'. The 'About' tab is active and displays the following information:

About	
Firmware Version	3.6.DY520.c
Hardware Version	HDY520
Serial Number	3927145099

Below the 'About' section is the 'Save/Restore Settings' section, which includes:

- Save current configuration (with a 'Save' button)
- Restore previous configuration (with a 'Choose File' button and 'No file chosen' text, and a 'Restore' button)
- Reset to factory default** (this text is circled in red in the original image, with a 'Reset' button next to it)

At the bottom right of the page, there is contact information for Mega System Technologies, Inc. and a logo with 'R6 READY' text.

Mega System Technologies, Inc.
Tel: +886-2-87922060 Fax: +886-2-87922066
E-mail: netagent@megatec.com.tw
http://www.megatec.com.tw