

DS807 & INVT

* INVT 3-Phase UPS



NetAgent 9

Latest Events

[09:50:39] UPS internal self-test complete.
[09:50:28] UPS self-test start

Information

- UPS Status
- System Status
- Remote Control
- NetFeeler
- Configuration**
- Log Information
- Management

System Information | **UPS Information** | Network Status

UPS Information

UPS Manufacturer	PCM
UPS Firmware Version	VER001.004
UPS Model	RM200-25C

Battery Information

Date of last battery replacement	
----------------------------------	--

Rating Information

Rectifier Voltage *	220V/381V 3P4W
Bypass Voltage *	220V/381V 3P4W
Output Voltage *	220V/381V 3P4W
Rectifier Frequency	60 Hz
Bypass Frequency	60 Hz

* SNMP Card DS807



NetAgent 9

Latest Events
[09:50:39] UPS internal self-test complete.
[09:50:28] UPS self-test start

Information

UPS Status

System Status

Remote Control

NetFeeler

Configuration

Log Information

Management

System Information

UPS Information

Network Status

System Information

Hardware Version	HDS807	UPS Last Self Test	--
Firmware Version	3.11.DS806	UPS Next Self Test	--
Serial Number	3926634394	UPS Critical Load	80 %
System Name	UPS Agent	UPS Critical Temperature	70.0 °C(158.0 °F)
System Contact	Administrator	UPS Critical Capacity	10 %
Location	My Office		
System Time	2024/10/07 10:20:49		
Uptime	00:21:26		
Warning will be initiated 10 minute(s) before Scheduled Shutdown Event			
Send Email for Daily Report (No)			

* UPS Status : Input information



NetAgent 9

Latest Events

[00:00:50] battery are very low. UPS will be shutdown
 [00:00:47] Battery Capacity Underrun (0%)
 [00:00:20] Server address can not be resolved.

Information


- UPS Status
- System Status
- Remote Control
- NetFeeler
- Configuration
- Log Information
- Management

UPS Status

Rectifier Voltage: 220V/381...	Bypass Voltage: 220V/381...	Output Voltage: 220V/381V ...
Battery Voltage: 240	Power Rating: 050KVA	Connection Mode: 3 IN 3 O...

Bypass Status

Reserve Voltage R/S/T (V)	227.6/229.1/228.0
Frequency (Hz)	59.9
Bypass Frequency	Normal
Bypass AC Power	Normal
Bypass Breaker On	Open

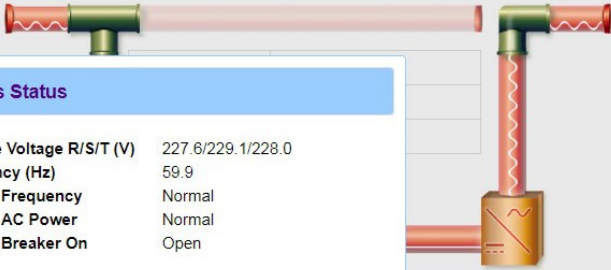

* UPS Status : Output information

The screenshot displays the NetAgent 9 software interface. The top header is purple with the NetAgent 9 logo. A 'Latest Events' box in the top right corner contains the following text:

- [00:00:50] battery are very low. UPS will be shutdown
- [00:00:47] Battery Capacity Underrun (0%)
- [00:00:20] Server address can not be resolved.

The left sidebar contains a menu with the following items:

- Information
- UPS Status
- System Status
- Remote Control
- NetFeeler
- Configuration
- Log Information
- Management

The main content area is titled 'UPS Status' and features a diagram of a UPS system. Above the diagram, the following status information is displayed:

Rectifier Voltage: 220V/381...	Bypass Voltage: 220V/381...	Output Voltage: 220V/381V ...
Battery Voltage: 240	Power Rating: 050KVA	Connection Mode: 3 IN 3 O...

An 'Output Status' pop-up window is overlaid on the diagram, showing the following data:

Output Voltage R/S/T (V)	220.9/221.1/221.2
Load R/S/T (%)	0.0/0.0/0.0
Frequency (Hz)	59.9
Static Switch	Inverter